

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

**THIS PAGE BLANK (USPTO)**



PHGB 010020

USA

II-II



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

11017 U.S. PTO  
10/067366



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.




Signed

*[Signature]*

Dated 17 September 2001

**THIS PAGE BLANK (USPTO)**



The  
Patent  
Office

1/77

**Request for grant of a patent**

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office  
Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference PHGB010020 09FEB01 E604837-1 D03008  
P01/7700 0.00-0103228.3

---

2. Patent application number 0103228.3 09 FEB 2001  
(The Patent Office will fill in this part)

---

3. Full name, address and postcode of the or of each applicant (*underline all surnames*) KONINKLIJKE PHILIPS ELECTRONICS N.V.  
GROENEWOUDSEWEG 1  
5621 BA EINDHOVEN  
THE NETHERLANDS  
  
Patents ADP Number (*if you know it*) 7419794001  
  
If the applicant is a corporate body, give the country/state of its incorporation THE NETHERLANDS

---

4. Title of the invention A METHOD OF DESPREADING GPS SIGNALS

---

5. Name of your agent (*if you have one*) Andrew G. White  
"Address for service" in the United Kingdom Philips Corporate Intellectual Property  
to which all correspondence should be sent Cross Oak Lane  
(*including the postcode*) Redhill  
Surrey RH1 5HA  
  
Patents ADP number (*if you know it*) 7653883001

---

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

	Country	Priority Application number ( <i>if you know it</i> )	Date of filing ( <i>day/month/year</i> )

---

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

	Number of earlier application	Date of filing ( <i>day/month/year</i> )

---

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer "Yes" if:*

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

YES

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

Continuation sheets of this form

Description  
Claims(s)  
Abstract  
Drawings

10

2

1

3

3 *See Summary*  
*only*

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and

search (*Patents Form 9/77*)

Request for substantive examination

(*Patents Form 10/77*)

Any other documents

(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature *S. Townsend*

Date *08/02/01*

12. Name and daytime telephone number of person to contact in the United Kingdom 01293 815339 (S. Townsend)

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered "Yes" Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

## DESCRIPTION

**A METHOD OF DESPREADING GPS SIGNALS**

5

This invention relates to a method of despreding a GPS spread spectrum signal received by a GPS receiver, and to a GPS receiver and a mobile communications device (especially a mobile cellular telephone) incorporating such a GPS receiver for the same.

10

It is well known to provide a GPS receiver in which replica GPS satellite pseudorandom noise (PRN) code signals are continuously generated and correlated with received GPS signals in order to acquire them. Typically, as the replica codes are likely to have a different code phase to those of the received GPS signals and also a different frequency due to Doppler shift between the receiver and orbiting satellites, a two dimensional code frequency / phase sweep is employed whereby such a sweep will eventually result in the incoming PRN code having the same frequency and code phase as that of the locally generated replica. If detected, the code is acquired and tracked, and the pseudorange information may be retrieved from which the position of the receiver may be calculated using conventional navigation algorithms.

20

It is further known to provide a mobile cellular telephone incorporating such a GPS receiver for the purpose of enabling operators of cellular telephone networks to determine the location from which a call is made and, in particular, for an emergency call to the emergency services. Of course for an emergency call, it is desirable for the call location to be available as soon as possible, however, from a "cold start" where the GPS receiver does not have access to up to date ephemeris data or even worse from a "factory cold start" where the GPS receiver does not have an up to date almanac, the time to first fix (TTFF) can be anywhere between 30 seconds and 5 minutes.

30

In order to reduce the TTFF, a GPS receiver may be provided with base station assistance in order to acquire GPS signals more quickly. Such

assistance may include the provision by the base station to the receiver of a precision carrier frequency reference signal for calibrating the local oscillator used in the GPS receiver; the data message for up to date satellite almanac and ephemeris data from which Doppler shift for satellites in view can be determined; and the current PRN code phase. With such assistance, it is possible to sweep only a narrowed range of frequencies and code phases in which the target PRN code is known to occupy, thereby reducing the number of code instances that need to be checked and thus reducing the time for code acquisition. Base station assistance is further described in US patents 5841396 and 5874914 which are incorporated herein by reference.

A substantial reduction in the number of code instances that need to be checked enables an increase in the dwell time for each check without significantly affecting the overall time to acquisition. The benefit of this is that an increase in the dwell time increases the probability of acquiring weak GPS signals. For example, for a single code instance or dwell, correlation may occur over a period of 10ms, equivalent to approximately 10 PRN code repetitions (C/A mode) or over a period of 100ms consists of 10 incoherently summed individual correlation periods of 10ms.

It is an object of the present invention to provide a method of despread GPS spread spectrum signals received by a GPS receiver in which the probability of acquiring weak signals is increased and, in particular but not exclusively, when dwells of extended duration are employed to acquire such weak signals.

According to the present invention, such a method is provided comprising the steps of providing Doppler information relating to an estimate of the variation in Doppler shift as observed on the target signal by the GPS receiver and which is attributable to the motion of the GPS satellite; and correlating the target signal with a reference signal containing PRN code sequences corresponding to those in the target signal, wherein, in the course of a single dwell, the correlation is modified as a function of the Doppler



information. This may occur, for example, by modifying either the target signal or the reference signal as a function of the Doppler information prior to correlation.

By being aware of and compensating for such sources of error, its detrimental effect on the signal acquisition process can be avoided or at least mitigated, thereby aiding in the acquisition of weak GPS signals. This is especially so when very long dwell periods are employed in an attempt to acquire remaining weak signals, for example, 1s worth of summed individual 10ms correlations. With a perfect frequency match, in theory one could integrate for an infinite period to acquire an infinitely weak signal. However, the variation in Doppler shift attributable to the motion of the satellite is typically be in the order of 1 Hz per second which, without compensate such Doppler variation, limits the useful integration periods to around  $0.5s$  (that is,  $\sim 1/2f$  where  $f$  is the frequency variation).

The Doppler shift may be calculated based on a last known position fix of the GPS receiver or alternatively, where the GPS receiver is incorporated in a mobile communications device adapted to communicate with a nearby communications base station, based on a position fix provided by the communications base station. For example, a position fix corresponds to the location of the communications base station.

The present invention will now be described, by way of example only, of an embodiment of a mobile cellular telephone comprising a GPS receiver for use in a cellular telephone network with reference to the accompanying schematic drawings in which:

Figure 1 shows the geographic layout of a cellular telephone network;  
Figure 2 shows the mobile cellular telephone MS1 of figure 1 in greater detail;  
Figure 3 shows the base station BS1 of figure 1 in greater detail; and  
Figure 4 shows the GPS receiver and processor of the mobile cellular telephone MS1 in greater detail.

The geographical layout of a conventional cellular telephone network 1 is shown schematically in figure 1. The network comprises a plurality of base stations BS of which seven, BS1 to BS7, are shown, situated at respective, mutually spaced geographic locations. Each of these base stations comprises  
5 the entirety of a radio transmitter and receiver operated by a trunking system controller at any one site or service area. The respective service areas SA1 to SA7 of these base stations overlap, as shown by the cross hatching, to collectively cover the whole region shown. The system may furthermore comprise a system controller SC provided with a two-way communication link,  
10 CL1 to CL7 respectively, to each base station BS1 to BS7. Each of these communication links may be, for example, a dedicated land-line. The system controller SC may, furthermore, be connected to a the public switched telephone network (PSTN) to enable communication to take place between a mobile cellular telephone MS1 and a subscriber to that network. A plurality of  
15 mobile cellular telephones MS are provided of which three, MS1, MS2 and MS3 are shown, each being able to roam freely throughout the whole region, and indeed outside it.

Referring to figure 2, mobile cellular telephone MS1 is shown in greater detail comprising a communications transmitter (Comm Tx) and receiver  
20 (Comm Rx) 21 connected to a communications antenna 20 and controlled by a communications microprocessor (Comm  $\mu$ c) 22 for communication with the base station BS1 with which it is registered. The design and manufacturing of such telephones for two-way communication within a cellular telephone network are well known, those parts which do not form part of the present  
25 invention will not be elaborated upon here further.

In addition to the conventional components of a mobile telephone, telephone MS1 further comprises a GPS receiver (GPS Rx) 24 connected to a GPS antenna 23 and controlled by a GPS microprocessor (GPS  $\mu$ c) 25 receiving GPS spread spectrum signals transmitted from orbiting GPS  
30 satellites. When operative, the GPS receiver 24 may receive NAVSTAR SPS GPS signal through an antenna 23 and pre-process them, typically by passive bandpass filtering in order to minimise out-of-band RF interference,

preamplification, down conversion to an intermediate frequency (IF) and analog to digital conversion. The resultant, digitised IF signal remains modulated, still containing all the information from the available satellites, and is fed into a memory of the GPS microprocessor 25. The GPS signals may then be acquired and tracked in any of several digital receiver channels, typically up to 12, for the purpose of deriving pseudorange information from which the position of the mobile telephone can be determined using conventional navigation algorithms. Such methods for GPS signal acquisition and tracking are well known, for example, see chapter 4 (GPS satellite signal characteristics) & chapter 5 (GPS satellite signal acquisition and tracking) of GPS Principles and Applications (Editor, Kaplan) ISBN 0-89006-793-7 Artech House. The GPS microprocessor 25 may be implemented in the form a general purpose microprocessor, optionally common with the communications microprocessor 22, or a microprocessor embedded in a GPS application specific integrated circuit (ASIC).

Cellular telephone network base station BS1 is shown schematically in figure 3. In addition to the conventional components of a base station, it further comprises a GPS antenna 34, receiver 35 and microprocessor 36 which are in substantially continual operation whereby the base station is in constant possession of up to date GPS satellite information. This information includes which of the orbiting satellites are presently in view (such satellites are likely to be common to both telephone and associated base station for even macrocells, obscuration aside); the GPS data message containing an up to date almanac and ephemeris data and satellite clock correction data, and the Doppler shift and current code phase of the GPS satellites signals as observed by the base station.

As is known, in the event of the user of the mobile cellular telephone MS1 making an emergency call and under the control of the system controller SC via a two-way communication link CL1, the base station BS1 may provide this information to the telephone whereby it is then only required to sweep a narrowed range of frequencies and code phases in which the target PRN code is known to occupy, ensuring rapid code acquisition and TTFF. A position fix

then transmitted back to the base station from the telephone, and then on to the emergency services operator, termed the Public Safety Answer Point (PSAP) in the US.

Referring to figure 4, the GPS microprocessor 25 of the telephone MS1 is shown schematically implementing a pseudorandom noise (PRN) code sweep in which early (E), prompt (P) and late (L) replica codes of satellite PRN codes are continuously generated, and compared to the incoming satellite PRN codes as received by the receiver. In order to retrieve pseudorange information from the signal samples stored in the GPS microprocessor 25, a carrier wave must be removed and this is done by the receiver generating in-phase (I) and quadrature phase (Q) replica carrier wave signals using a carrier wave generator 41. A carrier wave phase lock loop (PLL) is normally employed to accurately replicate the frequency of the received carrier wave. In order to acquire code phase lock, early (E), prompt (P) and late (L) replica codes of the PRN sequences are continuously generated by a code generator 42. The replica codes are then correlated with the I and Q signals to produce three in-phase correlation components ( $I_E$ ,  $I_L$ ,  $I_P$ ) and three quadrature phase correlation components ( $Q_E$ ,  $Q_L$ ,  $Q_P$ ), typically by integration in an integrator 43. A code phase discriminator is calculated as a function of the correlation components and a threshold test applied to the code phase discriminator; a phase match is declared if the code phase discriminator is high and if not, the code generator produces the next series of replicas with a phase shift. A linear phase sweep will eventually result in the incoming PRN code being in phase with that of the locally generated replica and thus code acquisition.

In accordance with the present invention, the GPS processor 25 of mobile telephone MS1 may acquire incoming GPS signals as illustrated in the following example:

5           Example

A user of mobile cellular telephone MS1 located inside a building where GPS signal reception is generally poor makes an emergency call to the emergency services (termed "public safety answer point" in the US). Under the control of the system controller SC via a two-way communication link CL1, the base station BS1 provides up to date almanac and ephemeris data, and the  
10       Doppler shift of the GPS satellites signals as currently being observed by the base station.

The GPS receiver samples 100ms of GPS signals and then, using the satellite information provided by the base station, the GPS processor 25  
15       employ a conventional early-minus-late correlation architecture in an attempt to acquire the GPS signals. Using a 10ms portion of the 100ms worth of GPS signal sampled, the GPS processor 25 sweeps only a narrowed range of frequencies in which the target PRN code is known to occupy and in doing so manage to acquire two GPS signals having a relatively strong signal-to-noise  
20       ratio. This may occur where, for example, the respective GPS satellites are in direct view of the GPS receiver though windows in the building. Then, having completed an unsuccessful sweep for the remaining GPS signals, two further being required to obtain a position fix, the GPS receiver employs a modified acquisition process in which:

25           (1) Using one of the signals currently acquired, the GPS processor 25 measures the variation in frequency of that signal as observed by the GPS receiver throughout the 100ms GPS signal sample. This may be done by either repetitively acquiring that signal using say several 10ms dwells throughout the 100ms sample sequence; or having acquiring that signal using  
30       an initial 10ms part of the 100ms sample sequence, tracking that signal though the 100ms sample sequence. The variations are typically attributable to local oscillator drift, the reference to which the frequencies are measured by the

GPS receiver, and variations in Doppler shift attributable to both handset and satellite movement.

(2) The frequency variation profile may be modified to exclude those frequency variations attributable to Doppler shift caused by the movement of the satellite associated with the acquired signal which can be readily calculated from ephemeris data provided by the base station or from a previously acquired GPS signal, a position estimate such as one based on a last known position fix or a position fix provided by the communications base station, and a knowledge of GPS time which may be derived from one GPS satellite and a position fix estimate.

(3) To assist in the acquisition of a further GPS signal, the frequency variation profile may be further modified to compensate for expected frequency variations attributable to Doppler shift caused by the movement of the satellite associated with that signal, i.e. the target signal. Again, this may be readily calculated from ephemeris data provided by the base station or acquired from a GPS signal, a position estimate and knowledge of GPS time.

(4) Using a dwell over the whole 100ms worth of GPS signal samples, the GPS processor again sweeps only a narrowed range of frequencies in which a target PRN code is known to occupy. This time however, the correlation process employed to acquire that signal is modified in accordance with the frequency variation profile as modified after step (3). That is, the effects of handset movement and local oscillator drift are removed or at least mitigated. This is done in any of the following ways: prior to processing the data in a conventional manner, mixing it with a signal that represents the detected frequency variation; or instead of mixing the data with a fixed frequency offset signal as part of the conventional search mechanism, using a variable frequency signal, adjusted in such a way as to incorporate the measured frequency variation.

In the above example, the variation in Doppler is taken into account during acquisition of relatively weak signals after 2 relatively strong signals have been acquired. Such variation may also be taken into account in order to acquire a first signal when, for example, ephemeris data, an estimate of the

position of the mobile telephone and current GPS time is provided to the cellular telephone by a base station.

Furthermore, as an alternative to the early-late correlation method, fast convolution methods and in particular, involving Fast Fourier Transforms (FFTs), may be used in order to acquired the PRN codes. Such convolution  
5 methods are described in a paper entitled "FFT processing of direct sequence spreading codes using modern DSP microprocessors" by Robert G Davenport, IEEE 1991 National Aerospace and Electronics Conference NAECON 1991, volume 1, pages 98 to 105, and also in US granted patent 5,663,734. The  
10 method of the present invention is equally is applicable to such convolution methods at least in that any carrier could be stripped from the signal as described above, before the FFT convolution was carried out.

The invention has largely been described in the context of NAVSTAR GPS, the all weather, spaced based navigation system developed and  
15 currently operated by the US Department of Defense. However, it will be appreciated that the general underlying principles of GPS are universal and not merely limited to NAVSTAR. Accordingly, GPS is intended to refer to any positioning system comprising a plurality of spread spectrum radio transmitters at different locations and a receiver which determines its location based on the  
20 time of arrival of the transmissions of the radio transmitters.

From a reading of the present disclosure, other modifications will be apparent to the skilled person and may involve other features which are already known in the design, manufacture and use of GPS receivers and component parts thereof and which may be used instead of or in addition to  
25 features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present application also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly, whether or not it relates to the same invention as  
30 presently claimed in any claim and whether or not it mitigates any or all of the same problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or

combinations of such features during the prosecution of the present application or of any further application derived therefrom.



## CLAIMS

1. A method of despreading a target GPS spread spectrum signal containing pseudorandom noise (PRN) code sequences and received by a  
5 GPS receiver, the method comprising the steps of:
- providing Doppler information relating to an estimate of the variation in Doppler shift as observed on the target signal by the GPS receiver and which is attributable to the motion of the GPS satellite; and
  - correlating the target signal with a reference signal containing  
10 corresponding PRN code sequences,
- wherein, in the course of a single dwell, the correlation is modified as a function of the Doppler information.
2. A method according to claim 1 wherein the target signal is  
15 modified as a function of the Doppler information prior to comparing it with the reference signal.
3. A method according to claim 1 wherein the reference signal is modified as a function of the Doppler information prior to comparing it with the  
20 target signal.
4. A method according to any of the preceding claims wherein the estimate of Doppler shift is calculated based on a last known position fix of the  
25 GPS receiver.
5. A method according to any of claims 1 to 3 wherein the GPS receiver is incorporated in a mobile communications device adapted to communicate with a nearby communications base station; and wherein the estimate of Doppler shift is calculated based on a position fix provided by the  
30 communications base station.

6. A method according to claim 5 wherein the position fix corresponds to the location of the communications base station.

7. A GPS receiver able to despread a GPS spread spectrum  
5 signal received by the GPS receiver by a method according to any of the preceding claims.

8. A mobile telephone comprising a GPS receiver according to claim 7.

## ABSTRACT


**A METHOD OF DESPREADING GPS SIGNALS**

5           A method of despreding GPS spread spectrum signals containing  
pseudorandom noise (PRN) code sequences and received by a GPS receiver  
(24) is disclosed together with a GPS receiver (24) and a mobile  
communications device (MS1) (especially a mobile cellular telephone) for the  
same. The method comprises the steps of providing Doppler information  
10 relating to an estimate of the variation in Doppler shift as observed on the  
target signal by the GPS receiver and which is attributable to the motion of the  
GPS satellite; and correlating the target signal with a reference signal  
containing corresponding PRN code sequences, wherein, in the course of a  
single dwell, the correlation is modified as a function of the Doppler  
15 information.

[Figure 2]

**THIS PAGE BLANK (USPTO)**

Fig.1.

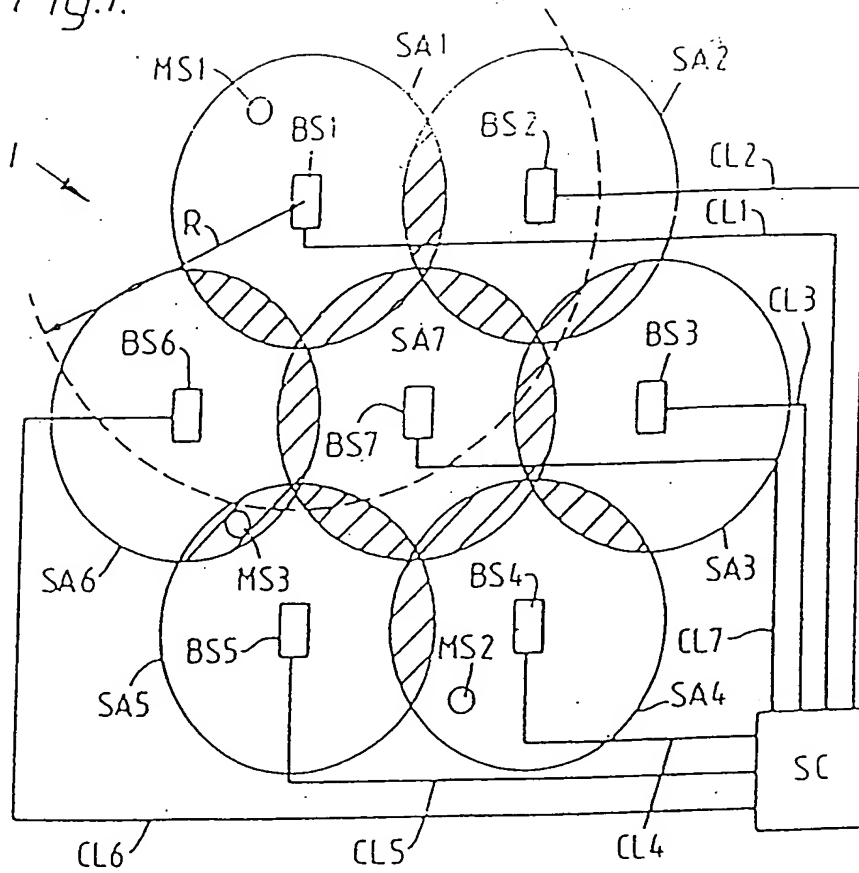

**THIS PAGE BLANK (USPTO,**

2/3

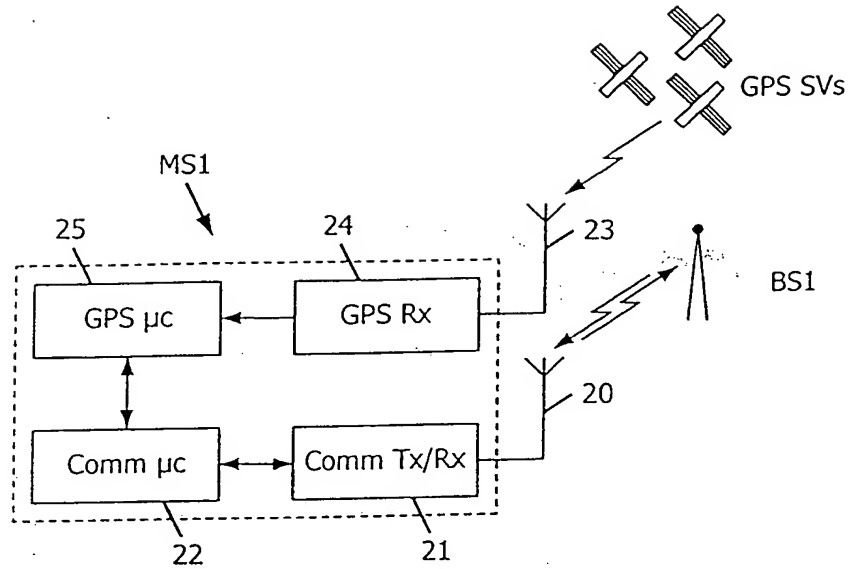


FIG. 2

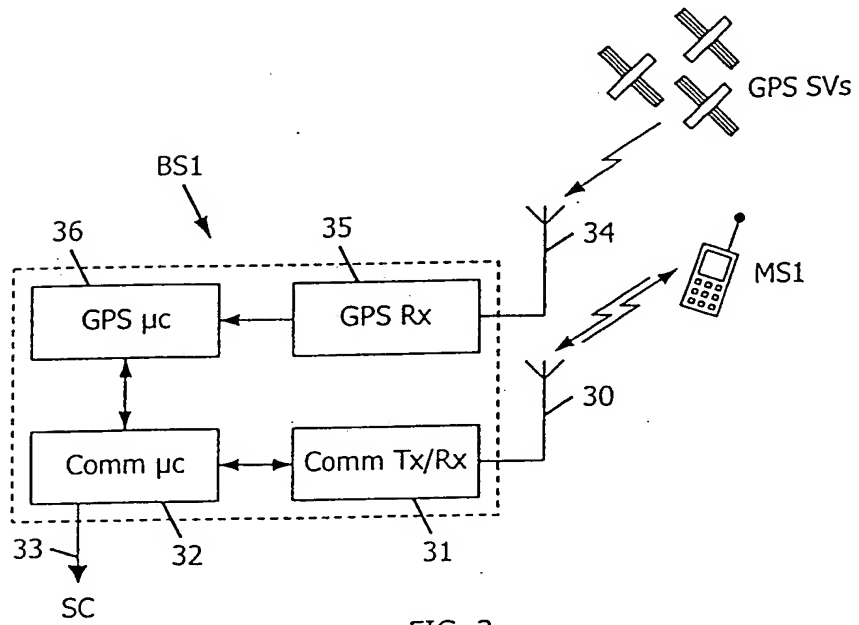


FIG. 3

**THIS PAGE BLANK (USPTO)**



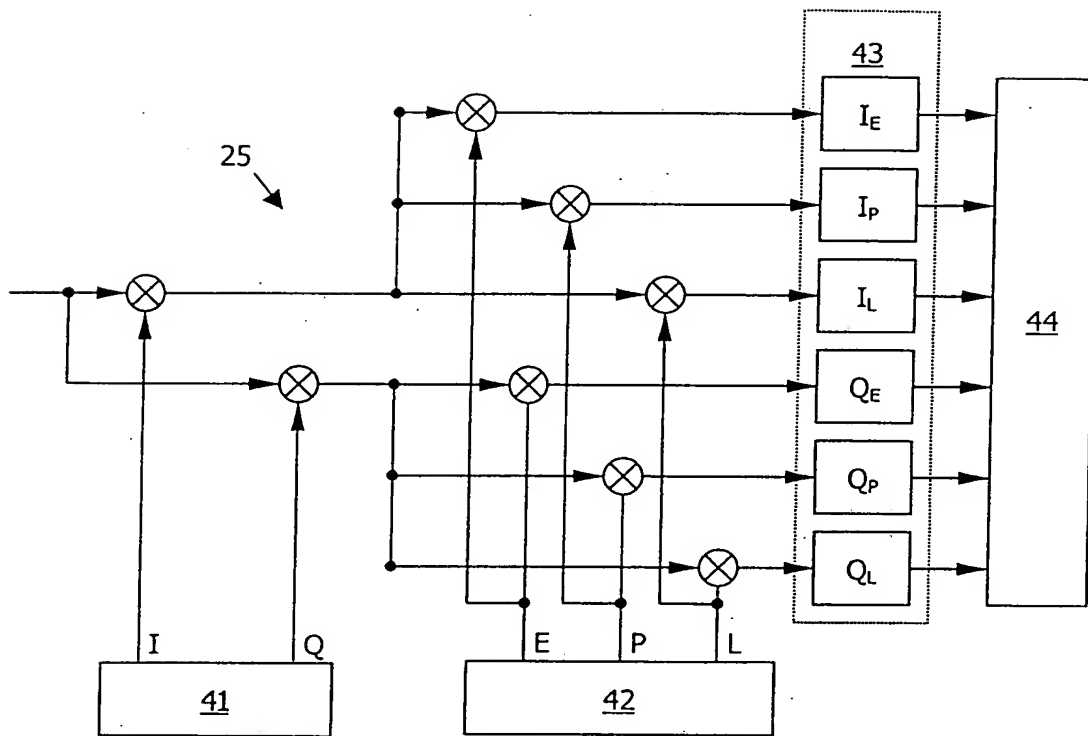


FIG. 4

**THIS PAGE BLANK (USPTO)**